




AccuCenter Vessel Centering Hardware Installation For Distek 2500 Series Systems

To assemble the insert into the underside of the vessel plate, use the 8/32" X 1 1/8" Cap Screw inserted into the fender washer.

Apply screw force using a 9/64th Allen Key to pull the insert into position from the underside of the vessel plate.

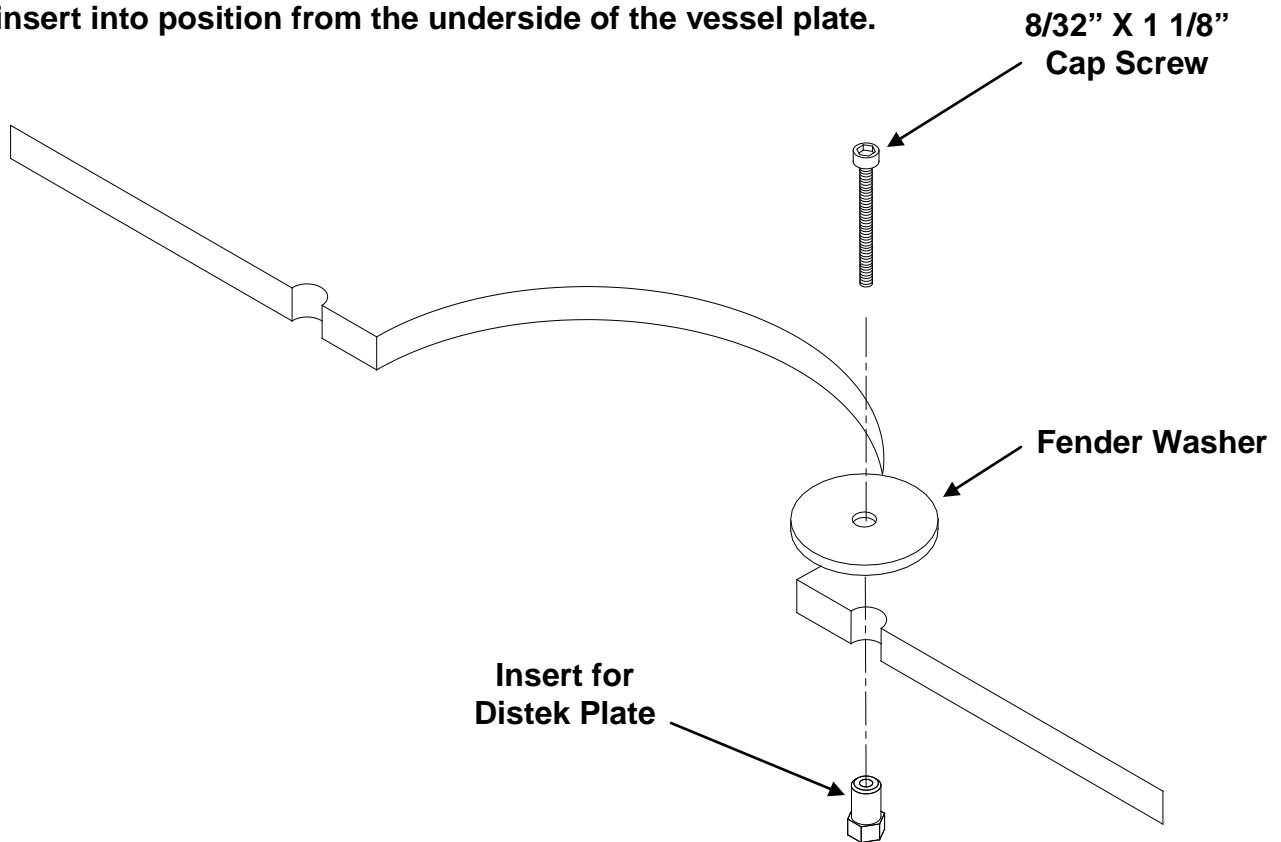

When the insert is pulled into position and fully seated, unscrew the 8/32" X 1 1/8" Cap Screw and remove the fender washer. Repeat the process for each insert being installed for each vessel position.